

符号/特点


- 1.外形轻巧, 安装简易, 便于快速拆装;
- 2.金属部件镀镍处理耐腐蚀, 经久耐用;
- 3.螺纹预涂氟胶, 密封性好, 使用便捷;
- 4.脱离环和簧片设计升级, 易于拆卸气管, 增强耐冲击性和寿命。



标准规格


配管直径 mm	Φ4	Φ6	Φ8	Φ10	Φ12	Φ16
使用流体	压缩空气、水					
管使用压力范围 MPa (kgf/cm²)	0~9 (0~9.2)					
环境及流体温度 °C	0~60					

螺纹规格

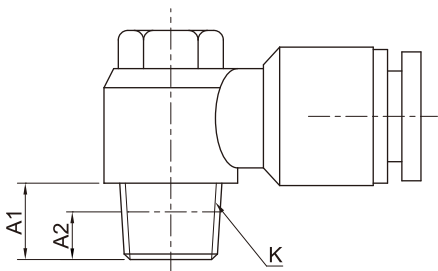

螺纹规格	M5×0.8	R1/8	R1/4	R3/8	R1/2
安装扭矩 (N.m)	1.5~1.9	7~9	12~14	22~24	28~30
A1	4	7	9	10	11
A2	4	4	6	6.5	8

接管要求




管径	聚氨酯管 A	尼龙管 A	半径 R
Ø4	±0.10	±0.08	20
Ø6	±0.12	±0.10	30
Ø8	±0.12	±0.10	50
Ø10	±0.15	±0.12	80
Ø12	±0.15	±0.12	150
Ø16	±0.15	±0.12	350



快插接头


内螺纹2通快插接头

• ZCF 内螺纹直通



型号	ØD	G	B	L	ØP	H
ZCF4-M5	4	M5	5.5	21.7	10	10
ZCF4-G01	4	G1/8	8	24.2	10	14
ZCF4-G02	4	G1/4	11	27.2	10	17
ZCF6-M5	6	M5	5.5	22.3	12	12
ZCF6-G01	6	G1/8	8	25.3	12	14
ZCF6-G02	6	G1/4	11	28.3	12	17
ZCF6-G03	6	G3/8	12	29.3	12	21
ZCF6-G04	6	G1/2	14	31.3	12	24
ZCF8-G01	8	G1/8	8	27	14	14
ZCF8-G02	8	G1/4	11	30	14	17
ZCF8-G03	8	G3/8	12	31	14	21
ZCF8-G04	8	G1/2	14	33	14	24
ZCF10-G01	10	G1/8	8	28.6	17	17
ZCF10-G02	10	G1/4	11	31.6	17	17
ZCF10-G03	10	G3/8	12	32.6	17	21
ZCF10-G04	10	G1/2	14	34.6	17	24
ZCF12-G01	12	G1/8	8	31.8	20	21
ZCF12-G02	12	G1/4	11	34.8	20	21
ZCF12-G03	12	G3/8	12	35.8	20	21
ZCF12-G04	12	G1/2	14	37.8	20	24
ZCF16-G02	16	G1/4	11	37	23.8	24
ZCF16-G03	16	G3/8	12	38	23.8	24
ZCF16-G04	16	G1/2	14	40	23.8	24

• ZLF 内螺纹L型2通



型号	Ø	G	B	L	ØP	H	A
ZLF4-M5	4	M5	5.5	19.5	11	10	18.8
ZLF4-G01	4	G1/8	8	24	11	14	18.8
ZLF4-G02	4	G1/4	11	27	11	17	18.8
ZLF6-M5	6	M5	5.5	21.7	13	12	19
ZLF6-G01	6	G1/8	8	24.4	13	14	19
ZLF6-G02	6	G1/4	11	27.7	13	17	19
ZLF6-G03	6	G3/8	12	28.7	13	21	19
ZLF6-G04	6	G1/2	14	30.9	13	24	19
ZLF8-G01	8	G1/8	8	27.3	14.8	14	22.5
ZLF8-G02	8	G1/4	11	30.3	14.8	17	22.5
ZLF8-G03	8	G3/8	12	32	14.8	21	22.5
ZLF8-G04	8	G1/2	14	34.3	14.8	24	22.5
ZLF10-G01	10	G1/8	8	27.3	18.4	17	27.8
ZLF10-G02	10	G1/4	11	34.3	18.4	17	27.8
ZLF10-G03	10	G3/8	12	36.3	18.4	21	27.8
ZLF10-G04	10	G1/2	14	38.8	18.4	24	27.8
ZLF12-G01	12	G1/8	8	33	21	21	29.5
ZLF12-G02	12	G1/4	11	37	21	21	29.5
ZLF12-G03	12	G3/8	12	38	21	21	29.5
ZLF12-G04	12	G1/2	14	40.5	21	24	29.5
ZLF16-G02	16	G1/4	11	37	26	24	32.2
ZLF16-G03	16	G3/8	12	38	26	24	32.2
ZLF16-G04	16	G1/2	14	42.5	26	24	32.2