

符号/特点


- 1.外形轻巧, 安装简易, 便于快速拆装;
- 2.金属部件镀镍处理耐腐蚀, 经久耐用;
- 3.螺纹预涂氟胶, 密封性好, 使用便捷;
- 4.脱离环和簧片设计升级, 易于拆卸气管, 增强耐冲击性和寿命。



标准规格


配管直径 mm	Φ4	Φ6	Φ8	Φ10	Φ12	Φ16
使用流体	压缩空气、水					
管使用压力范围 MPa (kgf/cm²)	0~9 (0~9.2)					
环境及流体温度 °C	0~60					

螺纹规格

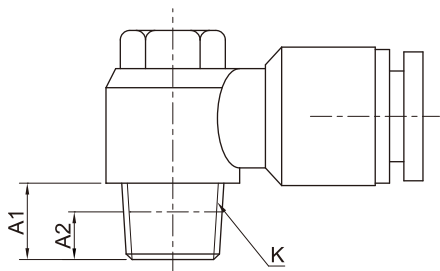

螺纹规格	M5×0.8	R1/8	R1/4	R3/8	R1/2
安装扭矩 (N.m)	1.5~1.9	7~9	12~14	22~24	28~30
A1	4	7	9	10	11
A2	4	4	6	6.5	8

接管要求

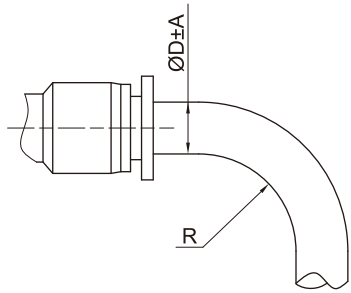


管径	聚氨酯管 A	尼龙管 A	半径 R
Ø4	±0.10	±0.08	20
Ø6	±0.12	±0.10	30
Ø8	±0.12	±0.10	50
Ø10	±0.15	±0.12	80
Ø12	±0.15	±0.12	150
Ø16	±0.15	±0.12	350



快插接头/功能性接头


高速旋转接头

• ZKSH-(R) 高速旋转直通

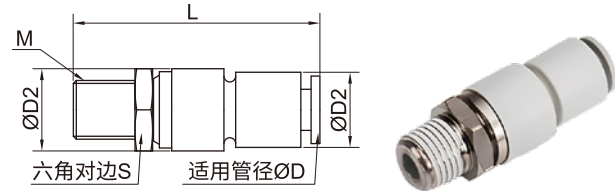

型号	ØD	M	S	D1	D2	L
ZKSH04-M5	4	M5X0.8	8	10.4	12	36.5
ZKSH04-M6	4	M6X1.0	8	10.4	12	37
ZKSH04-01S	4	Rc1/8	12	10.4	12	38
ZKSH06-M5	6	M5X0.8	8	12.8	14	37.5
ZKSH06-M6	6	M6X1.0	8	12.8	14	38
ZKSH06-01S	6	Rc1/8	14	12.8	14	39.5
ZKSH06-02S	6	Rc1/4	14	12.8	14	42.5
ZKSH08-01S	8	Rc1/8	17	15.2	17	44
ZKSH08-02S	8	Rc1/4	17	15.2	17	47
ZKSH08-03S	8	Rc3/8	17	15.2	17	48
ZKSH10-02S	10	Rc1/4	22	18.5	22	54
ZKSH10-03S	10	Rc3/8	22	18.5	22	55
ZKSH10-04S	10	Rc1/2	22	18.5	22	57.5
ZKSH12-03S	12	Rc3/8	24	20.9	24	57
ZKSH12-04S	12	Rc1/2	24	20.9	24	60


• ZKSL-(R) 高速旋转L型2通

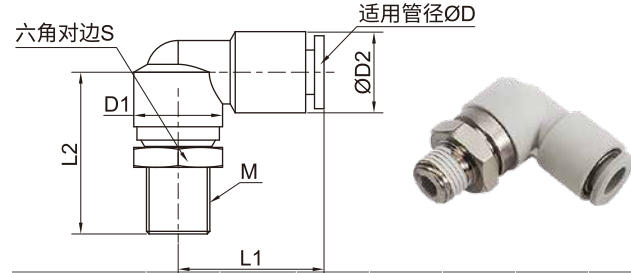

型号	ØD	M	S	D1	D2	L1	L2
ZKSL04-M5	4	M5X0.8	8	10.4	12	36.5	16
ZKSL04-M6	4	M6X1.0	8	10.4	12	37	16
ZKSL04-01S	4	Rc1/8	12	10.4	12	38	16
ZKSL06-M5	6	M5X0.8	8	12.8	14	37.5	17
ZKSL06-M6	6	M6X1.0	8	12.8	14	38	17
ZKSL06-01S	6	Rc1/8	14	12.8	14	39.5	17
ZKSL06-02S	6	Rc1/4	14	12.8	14	42.5	17
ZKSL08-01S	8	Rc1/8	17	15.2	17	44	18.5
ZKSL08-02S	8	Rc1/4	17	15.2	17	47	18.5
ZKSL08-03S	8	Rc3/8	17	15.2	17	48	18.5
ZKSL10-02S	10	Rc1/4	22	18.5	22	54	21
ZKSL10-03S	10	Rc3/8	22	18.5	22	55	21
ZKSL10-04S	10	Rc1/2	22	18.5	22	57.5	21
ZKSL12-03S	12	Rc3/8	24	20.9	24	57	22
ZKSL12-04S	12	Rc1/2	24	20.9	24	60	22


单向阀

• IVPC 直通单向阀

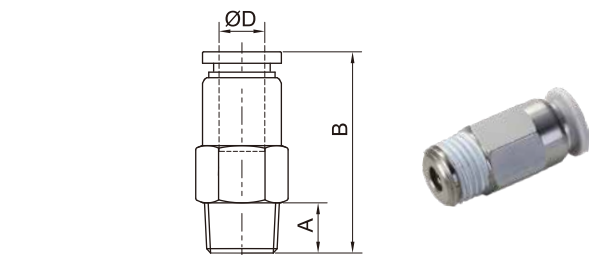

型号	ØD	R	A	B	H
IVPC4-M5	4	M5	4	21.2	10.3
IVPC4-01	4	Rc1/8	7.5	20.2	10.3
IVPC6-01	4	Rc1/4	9.5	18.3	14
IVPC6-02	6	M5	4	22.3	12.3
IVPC8-01	6	Rc1/8	7.5	20.8	12.3
IVPC8-02	6	Rc1/4	9.5	22.6	14
IVPC10-03	6	Rc3/8	10.5	20.6	17
IVPC10-04	6	Rc1/2	13.5	24.6	21
IVPC12-03	8	Rc1/8	7.5	27	14.3
IVPC12-04	8	Rc1/4	9.5	24.5	14.3


• IVPL 单向阀L型

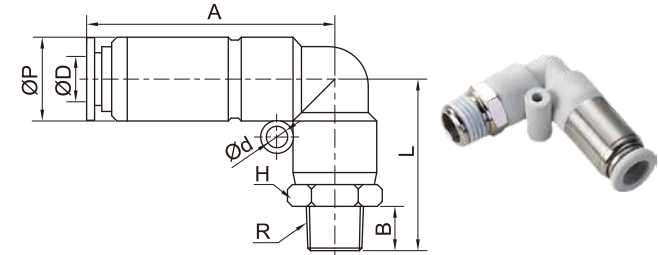

型号	ØD	L	A	B	ØP	H	R	Ød
IVPL4-M5	4	22.5	36.6	4	11	10	M5	3.2
IVPL4-01	4	25	36.6	7.5	11	10	Rc1/8	3.2
IVPL6-01	6	25.7	39.6	7.5	13	12	Rc1/8	3.2
IVPL6-02	6	28.2	39.6	9.5	13	14	Rc1/4	3.2
IVPL8-01	8	29.5	42.3	7.5	14.8	14	Rc1/8	3.2
IVPL8-02	8	31.5	42.3	9.5	14.8	14	Rc1/4	3.2
IVPL10-03	10	37.3	52.5	10.5	18.4	17	Rc3/8	4.2
IVPL10-04	10	40.8	52.5	13.5	18.4	21	Rc1/2	4.2
IVPL12-03	12	39.5	55.4	10.5	21	21	Rc3/8	4.2
IVPL12-04	12	42.5	55.4	13.5	21	21	Rc1/2	4.2

单向阀


• IVPU 2通单向阀

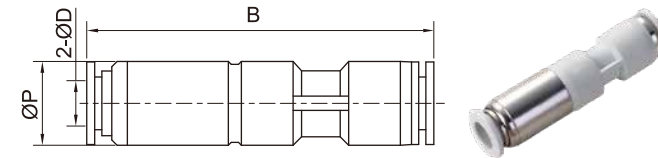

型号	ØD	ØP	B
IVPU4	4	11	51.4
IVPU6	6	13	55.8
IVPU8	8	14.8	58.3
IVPU10	10	18.4	71.9
IVPU12	12	21	74.9

先导式单向调速阀

• MTSP 带先导式单向阀型调速阀

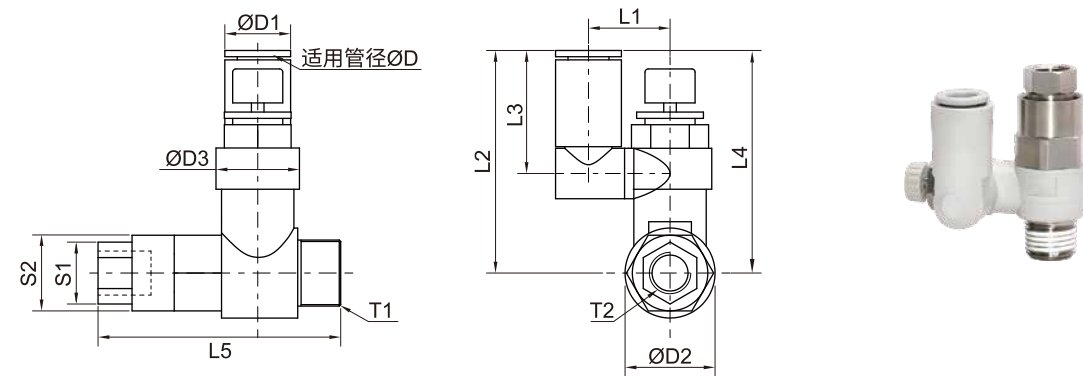

型号	ØD	T1	T2	S1	S2	ØD1	ØD2	ØD3	L1	L2	L3	L4(max)	L4(min)	L5	L6
MTSP06-01	6	Rc1/8	M5X0.8	12	8	11.6	14.2	11.8	14	38.4	22.9	39.6	34.6	38.6	24.7
MTSP08-01	8	Rc1/8	M5X0.8	12	8	15.2	14.2	11.8	15.8	44.7	28.2	38.9	33.9	38.6	24.7
MTSP06-02	6	Rc1/4	Rc1/8	17	12	12.8	18.5	15	18	43.4	25.2	41.7	36.7	48.2	31.5
MTSP08-02	8	Rc1/4	Rc1/8	17	12	15.2	18.5	15	19.7	46.4	28.2	41.7	36.7	48.2	31.5
MTSP08-03	8	Rc3/8	Rc1/8	19	12	15.2	23	19.8	20.3	51.3	28.2	46.9	41.9	55.1	35.6
MTSP10-03	10	Rc3/8	Rc1/8	19	12	18.5	23	19.8	23.1	54.1	32.6	46.9	41.9	55.1	35.6
MTSP10-04	10	Rc1/2	Rc1/4	24	17	18.5	28.6	26.5	25.9	64.2	32.6	64.8	57.3	69.4	43.5
MTSP12-04	12	Rc1/2	Rc1/4	24	17	20.9	28.6	26.5	25.9	66	34.4	64.8	57.3	69.4	43.5