

符号/特点


- 1.外形轻巧, 安装简易, 便于快速拆装;
- 2.金属部件镀镍处理耐腐蚀, 经久耐用;
- 3.螺纹预涂氟胶, 密封性好, 使用便捷;
- 4.脱离环和簧片设计升级, 易于拆卸气管, 增强耐冲击性和寿命。



标准规格


配管直径 mm	Φ4	Φ6	Φ8	Φ10	Φ12	Φ16
使用流体	压缩空气、水					
管使用压力范围 MPa (kgf/cm²)	0~9 (0~9.2)					
环境及流体温度 °C	0~60					

螺纹规格

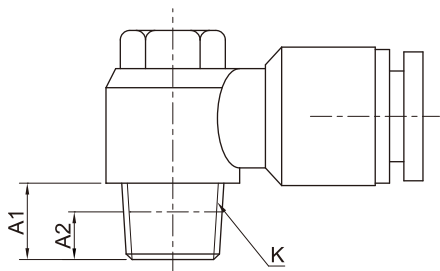

螺纹规格	M5×0.8	R1/8	R1/4	R3/8	R1/2
安装扭矩 (N.m)	1.5~1.9	7~9	12~14	22~24	28~30
A1	4	7	9	10	11
A2	4	4	6	6.5	8

接管要求

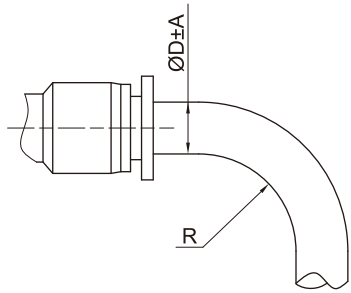


管径	聚氨酯管 A	尼龙管 A	半径 R
Ø4	±0.10	±0.08	20
Ø6	±0.12	±0.10	30
Ø8	±0.12	±0.10	50
Ø10	±0.15	±0.12	80
Ø12	±0.15	±0.12	150
Ø16	±0.15	±0.12	350



功能性接头

手阀


• MHVF 手阀

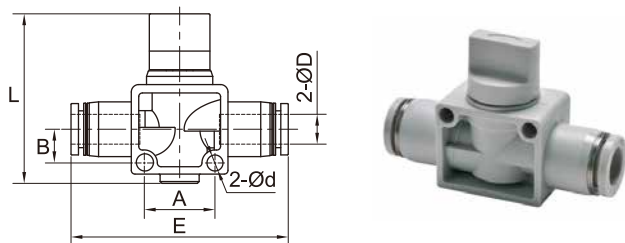

型号	ØD	Ød	A	B	E	L
MHVF06	6	4.2	16.5	8.5	51.1	42.6
MHVF08	8	4.2	16.5	8.5	52	42.6
MHVF10	10	4.2	21.5	10.5	63.3	47
MHVF12	12	4.2	21.5	10.5	64.1	47

节流阀

• MSA 大流量节流阀

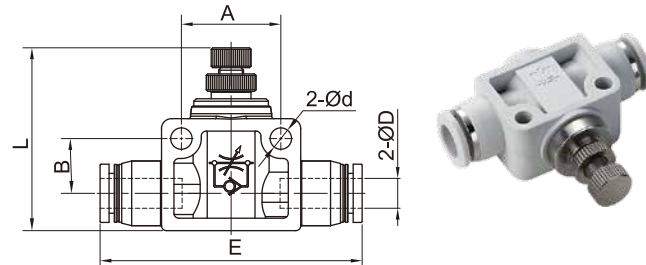


型号	ØD	Ød	A	B	E	L(min)	L(max)
MSA4	4	3.2	14	6.5	40.1	27.2	30.7
MSA6	6	4.2	20	8.5	47.6	39.3	45.5
MSA8	8	4.2	22	9.5	52	44.5	52.2
MSA10	10	4.2	26	10.5	63.5	46.8	52.8
MSA12	12	4.2	32	13	74	52	58

推锁型节流阀

• MTL 压锁式弯头型进(排)气节流阀

MTL 06 — 01 A

管径	螺纹尺寸	控制方式
04 Ø4	M5 M5X0.8	A 排气节流
06 Ø6	01 RC1/8	B 进气节流
08 Ø8	02 RC1/4	
10 Ø10	03 RC3/8	
12 Ø12	04 RC1/2	
16 Ø16		

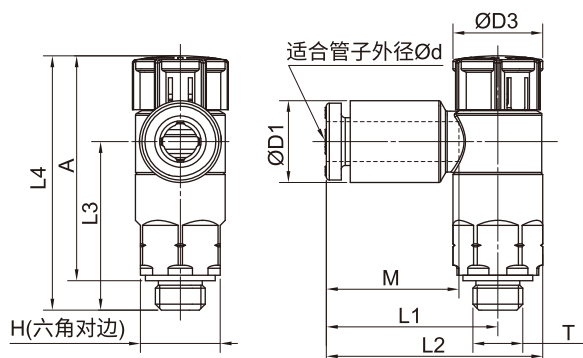

型号	Ød	T	H	D1	D3	L1	L2	L3	L4(解锁)	L4(锁紧)	A(解锁)	A(锁紧)	M
MTL04-M5A/B	4	M5X0.8	9	8.2	9.4	17.2	21.7	16.9	26.5	25.4	23.5	22.4	13.3
MTL06-M5A/B	6	M5X0.8	9	10.4	9.4	18.6	23.1	16.5	26.5	25.4	23.5	22.4	13.3
MTL04-01A/B	4	RC1/8	13	8.2	12	19.1	26.2	19.1	30.6	29.2	27.5	26.1	13.3
MTL06-01A/B	6	RC1/8	13	10.4	12	19.1	26.2	19.1	30.6	29.2	27.5	26.1	13.3
MTL08-01A/B	8	RC1/8	13	13.2	12	22.4	29.5	19.1	30.6	29.2	27.5	26.1	14.2
MTL10-01A/B	10	RC1/8	13	15.9	12	25.3	32.4	19.1	30.6	29.2	27.5	26.1	15.6
MTL04-02A/B	4	RC1/4	17	8.2	13	20.9	30.2	22.6	36.6	35	31.1	29.5	13.3
MTL06-02A/B	6	RC1/4	17	10.4	13	23.4	32.7	22.6	36.6	35	31.1	29.5	13.3
MTL08-02A/B	8	RC1/4	17	13.2	13	23.9	33.2	22.6	36.6	35	31.1	29.5	14.2
MTL10-02A/B	10	RC1/4	17	15.9	13	26.9	36.2	22.6	36.6	35	31.1	29.5	15.6
MTL06-03A/B	6	RC3/8	19	10.4	16.6	21.8	32.1	28.7	42.3	40.7	37.1	35.5	13.3
MTL08-03A/B	8	RC3/8	19	13.2	16.6	22.7	33	28.7	42.3	40.7	37.1	35.5	14.2
MTL10-03A/B	10	RC3/8	19	15.9	16.6	26.7	37	28	42.3	40.7	37.1	35.5	15.6
MTL12-03A/B	12	RC3/8	19	18.5	16.6	29.7	40	26.8	42.3	40.7	37.1	35.5	17
MTL10-04A/B	10	RC1/2	19	15.9	18.8	27.4	40.3	36.2	50.8	49.2	43.7	42.1	15.6
MTL12-04A/B	12	RC1/2	24	18.5	18.8	30.8	43.7	35.1	50.8	49.2	43.7	42.1	17
MTL16-04A/B	16	RC1/2	24	23.8	18.8	34.8	47.7	32.7	50.8	49.2	43.7	42.1	20.6