

符号/特点


- 1.外形轻巧, 安装简易, 便于快速拆装;
- 2.金属部件镀镍处理耐腐蚀, 经久耐用;
- 3.螺纹预涂氟胶, 密封性好, 使用便捷;
- 4.脱离环和簧片设计升级, 易于拆卸气管, 增强耐冲击性和寿命。



标准规格


配管直径 mm	Φ4	Φ6	Φ8	Φ10	Φ12	Φ16
使用流体	压缩空气、水					
管使用压力范围 MPa (kgf/cm²)	0~9 (0~9.2)					
环境及流体温度 °C	0~60					

螺纹规格

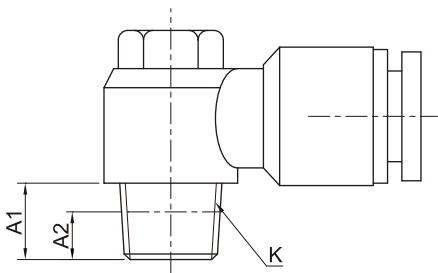

螺纹规格	M5×0.8	R1/8	R1/4	R3/8	R1/2
安装扭矩 (N.m)	1.5~1.9	7~9	12~14	22~24	28~30
A1	4	7	9	10	11
A2	4	4	6	6.5	8

接管要求




管径	聚氨酯管 A	尼龙管 A	半径 R
Ø4	±0.10	±0.08	20
Ø6	±0.12	±0.10	30
Ø8	±0.12	±0.10	50
Ø10	±0.15	±0.12	80
Ø12	±0.15	±0.12	150
Ø16	±0.15	±0.12	350



快插接头


外螺纹2通快插接头

• ZL L型螺纹两通

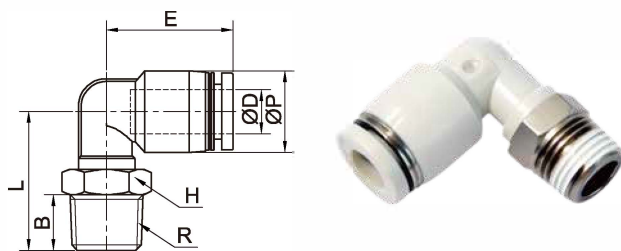

型号	ØD	R	L	E	B	ØP	H
ZL4-M5	4	M5	17.5	17.8	4	11	8
ZL4-01	4	Rc1/8	21.5	18.8	7.5	11	10
ZL4-02	4	Rc1/4	24.5	18.8	9.5	11	14
ZL6-M5	6	M5	17.5	19.1	4	13	8
ZL6-01	6	Rc1/8	23.7	19	7.5	13	12
ZL6-02	6	Rc1/4	26.2	19	9.5	13	14
ZL6-03	6	Rc3/8	27.7	19	10.5	13	17
ZL6-04	6	Rc1/2	31.2	19	13.5	13	21
ZL8-01	8	Rc1/8	25.6	22.5	7.5	14.8	14
ZL8-02	8	Rc1/4	27.6	22.5	9.5	14.8	14
ZL8-03	8	Rc3/8	29.1	22.5	10.5	14.8	17
ZL8-04	8	Rc1/2	32.6	22.5	13.5	14.8	21
ZL10-01	10	Rc1/8	30.5	27.8	7.5	18.4	17
ZL10-02	10	Rc1/4	32.5	27.8	9.5	18.4	17
ZL10-03	10	Rc3/8	33.5	27.8	10.5	18.4	17
ZL10-04	10	Rc1/2	37	27.8	13.5	18.4	21
ZL12-01	12	Rc1/8	33.2	29.5	7.5	21	17
ZL12-02	12	Rc1/4	35.2	29.5	9.5	21	17
ZL12-03	12	Rc3/8	36.2	29.5	10.5	21	17
ZL12-04	12	Rc1/2	39.2	29.5	13.5	21	21
ZL16-02	16	Rc1/4	42	32.2	9.5	26	24
ZL16-03	16	Rc3/8	43	32.2	10.5	26	24
ZL16-04	16	Rc1/2	46	32.2	13.5	26	24

• ZLL L型加长螺纹两通

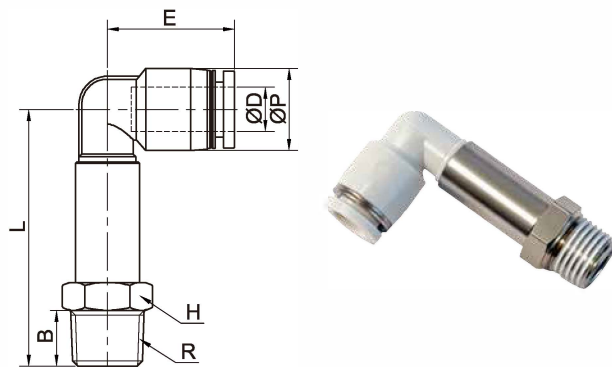

型号	ØD	R	L	E	B	ØP	H
ZLL4-M5	4	M5	30.5	17.8	4	11	8
ZLL4-01	4	Rc1/8	33.5	18.8	7.5	11	10
ZLL4-02	4	Rc1/4	36.5	18.8	9.5	11	14
ZLL6-M5	6	M5	32.5	19.1	4	13	8
ZLL6-01	6	Rc1/8	37.7	19	7.5	13	12
ZLL6-02	6	Rc1/4	40.2	19	9.5	13	14
ZLL6-03	6	Rc3/8	41.7	19	10.5	13	17
ZLL6-04	6	Rc1/2	45.2	19	13.5	13	21
ZLL8-01	8	Rc1/8	41.4	22.5	7.5	14.8	14
ZLL8-02	8	Rc1/4	43.4	22.5	9.5	14.8	14
ZLL8-03	8	Rc3/8	44.9	22.5	10.5	14.8	17
ZLL8-04	8	Rc1/2	48.4	22.5	13.5	14.8	21
ZLL10-01	10	Rc1/8	50.5	27.8	7.5	18.4	17
ZLL10-02	10	Rc1/4	52.5	27.8	9.5	18.4	17
ZLL10-03	10	Rc3/8	53.5	27.8	10.5	18.4	17
ZLL10-04	10	Rc1/2	57	27.8	13.5	18.4	21
ZLL12-01	12	Rc1/8	56.2	29.5	7.5	21	17
ZLL12-02	12	Rc1/4	58.2	29.5	9.5	21	17
ZLL12-03	12	Rc3/8	59.2	29.5	10.5	21	17
ZLL12-04	12	Rc1/2	62.2	29.5	13.5	21	21
ZLL16-02	16	Rc1/4	71	32.2	9.5	26	24
ZLL16-03	16	Rc3/8	72	32.2	10.5	26	24
ZLL16-04	16	Rc1/2	75	32.2	13.5	26	24