

符号/特点


- 1.外形轻巧, 安装简易, 便于快速拆装;
- 2.金属部件镀镍处理耐腐蚀, 经久耐用;
- 3.螺纹预涂氟胶, 密封性好, 使用便捷;
- 4.脱离环和簧片设计升级, 易于拆卸气管, 增强耐冲击性和寿命。



标准规格


| 配管直径 mm               | Φ4          | Φ6 | Φ8 | Φ10 | Φ12 | Φ16 |
|-----------------------|-------------|----|----|-----|-----|-----|
| 使用流体                  | 压缩空气、水      |    |    |     |     |     |
| 管使用压力范围 MPa (kgf/cm²) | 0~9 (0~9.2) |    |    |     |     |     |
| 环境及流体温度 °C            | 0~60        |    |    |     |     |     |

螺纹规格

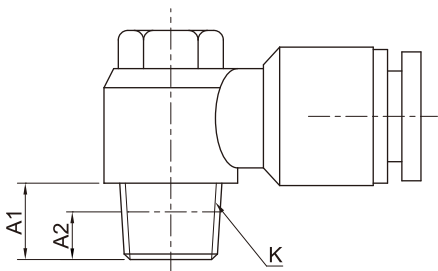

| 螺纹规格       | M5×0.8  | R1/8 | R1/4  | R3/8  | R1/2  |
|------------|---------|------|-------|-------|-------|
| 安装扭矩 (N.m) | 1.5~1.9 | 7~9  | 12~14 | 22~24 | 28~30 |
| A1         | 4       | 7    | 9     | 10    | 11    |
| A2         | 4       | 4    | 6     | 6.5   | 8     |

接管要求




| 管径  | 聚氨酯管 A | 尼龙管 A | 半径 R |
|-----|--------|-------|------|
| Ø4  | ±0.10  | ±0.08 | 20   |
| Ø6  | ±0.12  | ±0.10 | 30   |
| Ø8  | ±0.12  | ±0.10 | 50   |
| Ø10 | ±0.15  | ±0.12 | 80   |
| Ø12 | ±0.15  | ±0.12 | 150  |
| Ø16 | ±0.15  | ±0.12 | 350  |



## 快插接头


### 2通快插接头

#### • ZU 塑料2通




| 型号   | A    | ØP   | ØD |
|------|------|------|----|
| ZU04 | 33.6 | 11   | 4  |
| ZU06 | 35.2 | 13   | 6  |
| ZU08 | 38.5 | 14.8 | 8  |
| ZU10 | 47.2 | 18.4 | 10 |
| ZU12 | 49   | 21   | 12 |
| ZU16 | 49.9 | 26   | 16 |

#### • ZG 减径U型2通



| 型号      | A    | ØP   | ØD1 | ØD2 |
|---------|------|------|-----|-----|
| ZG06-04 | 35.2 | 13   | 6   | 4   |
| ZG08-04 | 38.3 | 14.8 | 8   | 4   |
| ZG08-06 | 38.3 | 14.8 | 8   | 6   |
| ZG10-06 | 46   | 18.4 | 10  | 6   |
| ZG10-08 | 46.2 | 18.4 | 10  | 8   |
| ZG12-08 | 48   | 21   | 12  | 8   |
| ZG12-10 | 49   | 21   | 12  | 10  |
| ZG16-10 | 49.2 | 26   | 16  | 10  |
| ZG16-12 | 49.2 | 26   | 16  | 12  |


#### • ZV 塑料L型2通



| 型号   | E    | P    | ØD | Ød  | C    |
|------|------|------|----|-----|------|
| PV04 | 18.8 | 11   | 4  | 3.2 | 7    |
| PV06 | 19   | 13   | 6  | 3.2 | 8    |
| PV08 | 22.5 | 14.8 | 8  | 3.2 | 10   |
| PV10 | 27.8 | 18.4 | 10 | 4.2 | 12   |
| PV12 | 29.5 | 21   | 12 | 4.2 | 13.5 |
| PV16 | 32.2 | 26   | 16 | 5   | 15.5 |


### 3通快插接头

#### • ZY 塑料Y型3通




| 型号   | F    | B    | ØP   | ØD | Ød  |
|------|------|------|------|----|-----|
| ZY04 | 14.3 | 36.1 | 11   | 4  | 3.2 |
| ZY06 | 14.8 | 37.1 | 13   | 6  | 3.2 |
| ZY08 | 17.9 | 39.8 | 14.8 | 8  | 3.2 |
| ZY10 | 21   | 50   | 18.4 | 10 | 4.2 |
| ZY12 | 21.5 | 53   | 21   | 12 | 4.2 |
| ZY16 | 22.7 | 60   | 26   | 16 | 5   |

#### • ZW 减径Y型3通




| 型号      | F    | B    | ØP   | ØD1 | ØD2 | Ød  |
|---------|------|------|------|-----|-----|-----|
| ZW06-04 | 14.8 | 39.1 | 13   | 6   | 4   | 3.2 |
| ZW08-04 | 17.7 | 39.6 | 14.8 | 8   | 4   | 3.2 |
| ZW08-06 | 17.7 | 39.6 | 14.8 | 8   | 6   | 3.2 |
| ZW10-06 | 19.8 | 48.8 | 18.4 | 10  | 6   | 4.2 |
| ZW10-08 | 20   | 59   | 18.4 | 10  | 8   | 4.2 |
| ZW12-08 | 20.5 | 52   | 21   | 12  | 8   | 4.2 |
| ZW12-10 | 21.5 | 53   | 21   | 12  | 10  | 4.2 |
| ZW16-12 | 22   | 59.3 | 26   | 16  | 12  | 5   |

#### • ZE 塑料T型3通




| 型号   | E    | C    | ØP   | ØD | Ød  |
|------|------|------|------|----|-----|
| ZE04 | 18.8 | 7    | 11   | 4  | 3.2 |
| ZE06 | 19.3 | 8    | 13   | 6  | 3.2 |
| ZE08 | 22.5 | 9    | 14.8 | 8  | 3.2 |
| ZE10 | 28.5 | 12   | 18.4 | 10 | 4.2 |
| ZE12 | 29.5 | 13.5 | 21   | 12 | 4.2 |
| ZE16 | 32.2 | 15.5 | 26   | 16 | 5   |

#### • ZEG 变径T型3通



| 型号       | E    | L    | C    | ØP   | ØD1 | ØD2 | Ød  |
|----------|------|------|------|------|-----|-----|-----|
| ZEG06-04 | 19.3 | 38.6 | 8    | 13   | 6   | 4   | 3.2 |
| ZEG08-04 | 22.3 | 45   | 9    | 14.8 | 8   | 4   | 3.2 |
| ZEG08-06 | 22.3 | 45   | 9    | 14.8 | 8   | 6   | 3.2 |
| ZEG10-06 | 27.3 | 57   | 12   | 18.4 | 10  | 6   | 4.2 |
| ZEG10-08 | 27.5 | 57   | 12   | 18.4 | 10  | 8   | 4.2 |
| ZEG12-08 | 28.5 | 59   | 13.5 | 21   | 12  | 8   | 4.2 |
| ZEG12-10 | 29.5 | 59   | 13.5 | 21   | 12  | 10  | 4.2 |
| ZEG16-12 | 31.5 | 64.4 | 15.5 | 26   | 16  | 12  | 5   |

#### • ZEW 变径T型3通



| 型号       | E    | L    | C    | ØP   | ØD1 | ØD2 | Ød  |
|----------|------|------|------|------|-----|-----|-----|
| ZEW06-04 | 19.3 | 38.6 | 8    | 13   | 6   | 4   | 3.2 |
| ZEW08-04 | 22.5 | 44.6 | 9    | 14.8 | 8   | 4   | 3.2 |
| ZEW08-06 | 22.5 | 44.6 | 9    | 14.8 | 8   | 6   | 3.2 |
| ZEW10-06 | 28.5 | 54.6 | 12   | 18.4 | 10  | 6   | 4.2 |
| ZEW10-08 | 28.5 | 55   | 12   | 18.4 | 10  | 8   | 4.2 |
| ZEW12-08 | 29.5 | 57   | 13.5 | 21   | 12  | 8   | 4.2 |
| ZEW12-10 | 29.5 | 59   | 13.5 | 21   | 12  | 10  | 4.2 |
| ZEW16-12 | 32.2 | 63   | 15.5 | 26   | 16  | 12  | 5   |

