


残压释放3通阀(单作用型) MVHS 系列



符号/特点



标准规格

型号	MVHS20	MVHS30	MVHS40	MVHS40-06	MVHS50
使用流体	空气				
环境温度及使用流体温度	-5~60°C(未冻结)				
保证耐压力	1.5MPa				
使用压力范围	0.1-1.0MPa				
旋转切换角度	90°				
外观颜色(标准)	旋钮:红色, 本体:银白色				

流量特性

型号	接管口径		MVHS40-06					
	IN,OUT	EXH	IN→OUT			OUT→EXH		
			C(dm³/S.bar)	b	Cv	C(dm³/S.bar)	b	Cv
MVHS20	1/8	1/8	2.4	0.43	0.65	2.5	0.39	0.69
MVHS20	1/4	1/8	3.3	0.40	0.88	3.1	0.51	0.84
MVHS30	1/4	1/4	6.4	0.45	1.7	6.2	0.38	1.7
MVHS30	3/8	1/4	8.3	0.41	2.3	7.0	0.41	1.9
MVHS40	1/4	3/8	7.3	0.49	2.0	8.5	0.35	2.3
MVHS40	3/8	3/8	10.9	0.45	3.0	11.6	0.40	3.1
MVHS40	1/2	3/8	14.2	0.39	3.8	13.3	0.43	3.6
MVHS40	3/4	1/2	18.3	0.31	5.0	17.7	0.37	4.8
MVHS50	3/4	1/2	23.8	0.41	6.4	21.8	0.41	5.9
MVHS50	1	1/2	31.9	0.33	8.6	23.5	0.44	6.4





残压释放3通阀(单作用型) MVHS 系列

订购码

MVHS	40	—	N	04	A	—	BS					
系列 MVHS	本体尺寸	螺纹种类		配管口径					可选项			
	20	无记号	Rc	记号	螺纹规格	本体尺寸				无记号	-	
	30	N	NPT			20	30	40	50	B	带托架	
	40	G	G			01	1/8	●	-	-	-	S  内置消音器
	50					02	1/4	●	●	●	-	
			03			3/8	-	●	●	-		
			04	1/2	-	-	●	-				
				06	3/4	-	-	●	●			
				10	1	-	-	-	●			

构造图

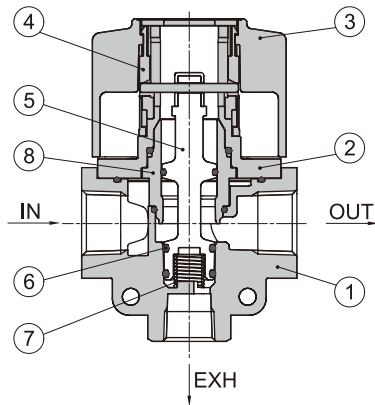


构成零部件								
序号	1	2	3	4	5	6	7	8
名称	本体	上盖	旋钮	凸轮环	阀轴	阀轴O形圈	阀轴弹簧	轴套
材质	ADC12	难燃PBT	难燃PBT	POM	PBT	H-NBR	不锈钢	POM

残压释放3通阀(单作用型) MVHS 系列



外形尺寸

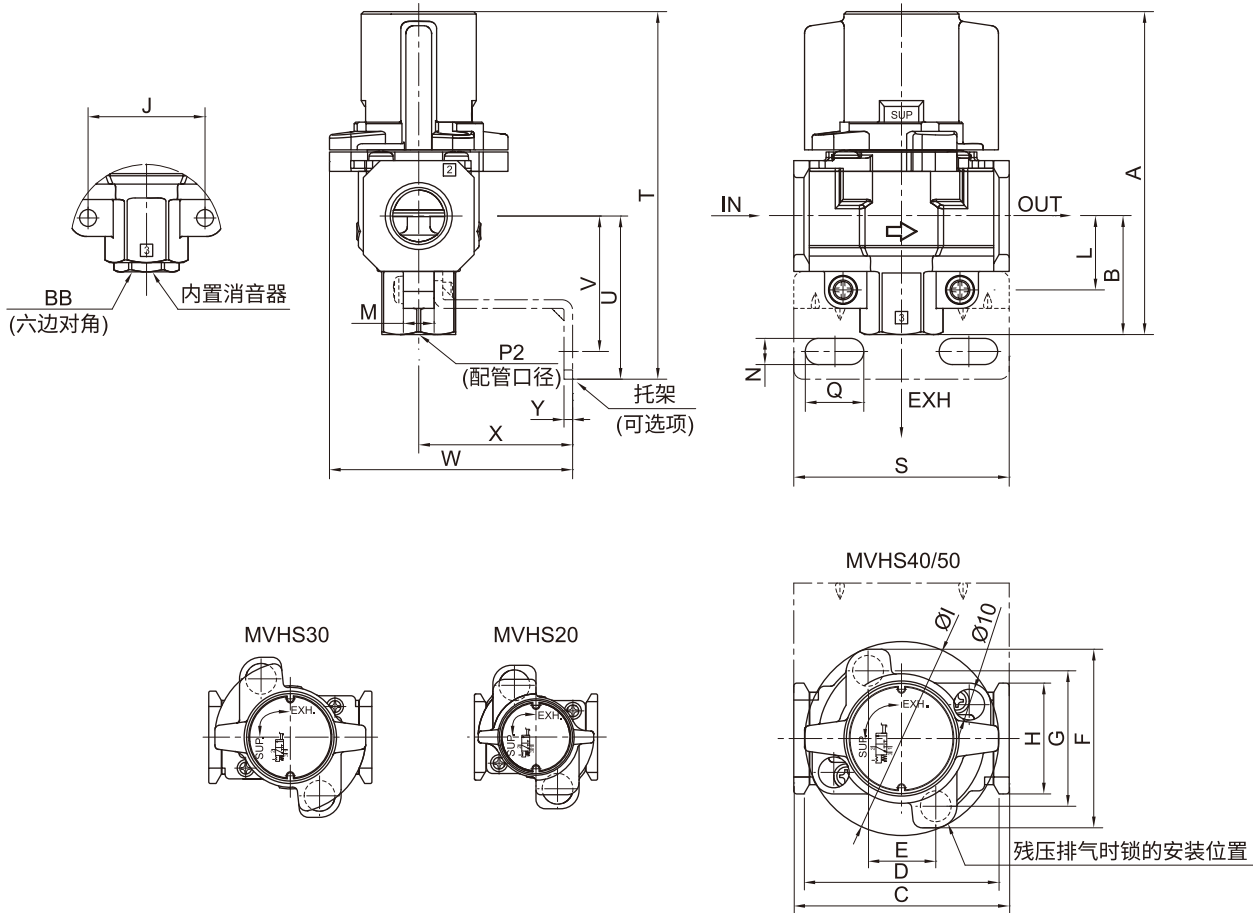

型号	标准规格														
	P1	P2	A	B	C	D	E	F	G	H	I	J	K	L	M
MVHS20	1/8, 1/4	1/8	66.4	22.3	40	37.5	14	46.6	33.6	28	37.5	24	4.5	14.8	9
MVHS30	1/4, 3/8	1/4	80.3	29.4	53	49	19	52	38	30	49	30	4.5	19	9
MVHS40	1/4, 3/8, 1/2	3/8	104.9	38.5	70	63	22	58	44	36	63	38	5.5	24	10
MVHS40-06	3/4	1/2	110.4	42	75	63	22	58	44	44	63	43	5.5	26	10
MVHS50	3/4, 1	1/2	134.3	53	90	76	26	76	61	53	81	50	6.5	31	12

型号	可选规格											
	N	A	R	S	T	U	V	W	X	Y	AA	BB
MVHS20	5.4	8.4	27	40	75.4	31.3	25.3	53.3	30	2.3	3	12
MVHS30	6.5	10	36.5	53	90.9	40	33	67	41	2.3	3	14
MVHS40	8.5	19	43.5	70	119.4	53	44	79	50	2.8	3	19
MVHS40-06	8.5	19	43.5	70	123.4	55	46	79	50	2.8	4	22
MVHS50	11	27.5	49.5	90	152.3	71	60	108	70	3.2	4	22