

符号/特点


- 1.外形轻巧, 安装简易, 便于快速拆装;
- 2.金属部件镀镍处理耐腐蚀, 经久耐用;
- 3.螺纹预涂氟胶, 密封性好, 使用便捷;
- 4.脱离环和簧片设计升级, 易于拆卸气管, 增强耐冲击性和寿命。



标准规格


配管直径 mm	Φ4	Φ6	Φ8	Φ10	Φ12	Φ16
使用流体	压缩空气、水					
管使用压力范围 MPa (kgf/cm²)	0~9 (0~9.2)					
环境及流体温度 °C	0~60					

螺纹规格

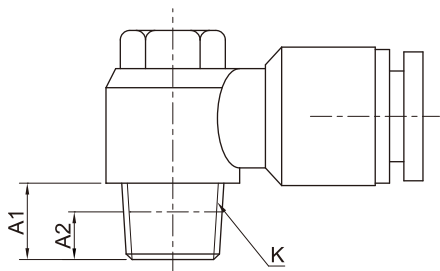

螺纹规格	M5×0.8	R1/8	R1/4	R3/8	R1/2
安装扭矩 (N.m)	1.5~1.9	7~9	12~14	22~24	28~30
A1	4	7	9	10	11
A2	4	4	6	6.5	8


接管要求

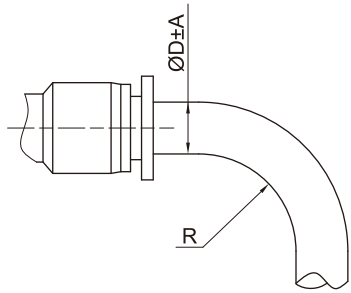

管径	聚氨酯管 A	尼龙管 A	半径 R
Ø4	±0.10	±0.08	20
Ø6	±0.12	±0.10	30
Ø8	±0.12	±0.10	50
Ø10	±0.15	±0.12	80
Ø12	±0.15	±0.12	150
Ø16	±0.15	±0.12	350

单向阀


•IVPU 2通单向阀

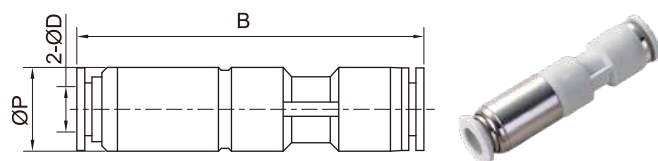

型号	ØD	ØP	B
IVPU4	4	11	51.4
IVPU6	6	13	55.8
IVPU8	8	14.8	58.3
IVPU10	10	18.4	71.9
IVPU12	12	21	74.9

先导式单向调速阀

•MTSP 带先导式单向阀型调速阀

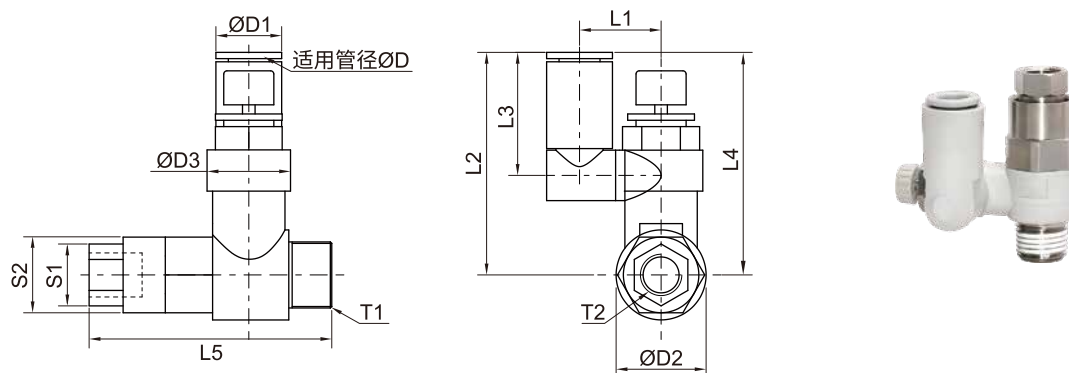

型号	ØD	T1	T2	S1	S2	ØD1	ØD2	ØD3	L1	L2	L3	L4(max)	L4(min)	L5	L6
MTSP06-01	6	Rc1/8	M5X0.8	12	8	11.6	14.2	11.8	14	38.4	22.9	39.6	34.6	38.6	24.7
MTSP08-01	8	Rc1/8	M5X0.8	12	8	15.2	14.2	11.8	15.8	44.7	28.2	38.9	33.9	38.6	24.7
MTSP06-02	6	Rc1/4	Rc1/8	17	12	12.8	18.5	15	18	43.4	25.2	41.7	36.7	48.2	31.5
MTSP08-02	8	Rc1/4	Rc1/8	17	12	15.2	18.5	15	19.7	46.4	28.2	41.7	36.7	48.2	31.5
MTSP08-03	8	Rc3/8	Rc1/8	19	12	15.2	23	19.8	20.3	51.3	28.2	46.9	41.9	55.1	35.6
MTSP10-03	10	Rc3/8	Rc1/8	19	12	18.5	23	19.8	23.1	54.1	32.6	46.9	41.9	55.1	35.6
MTSP10-04	10	Rc1/2	Rc1/4	24	17	18.5	28.6	26.5	25.9	64.2	32.6	64.8	57.3	69.4	43.5
MTSP12-04	12	Rc1/2	Rc1/4	24	17	20.9	28.6	26.5	25.9	66	34.4	64.8	57.3	69.4	43.5