

# 油压稳速器 HR 系列



## 符号/特点

- 1.结构紧凑, 安装自由 ;
- 2.减少负载变动带来的扰动, 获得长时间连续、稳定的速度;
- 3.附带刻度调节旋钮, 实现简单精确的速度调节。




## 订购码

|          |                        |      |
|----------|------------------------|------|
| HR       | 24                     | 12   |
| 系列号      | 本体外径                   | 行程   |
| HR:油压稳速器 | 24    Ø24<br>31    Ø31 | 详见列表 |


## 标准规格

| 缸径       | 行程[mm] | 最大负荷[Kgf] | 工作温度[°C] |
|----------|--------|-----------|----------|
| HR-2415  | 15     | 350       | -45~+80  |
| HR-2425  | 25     | 350       | -45~+80  |
| HR-2430  | 30     | 350       | -45~+80  |
| HR-2460  | 60     | 350       | -45~+80  |
| HR-2480  | 80     | 350       | -45~+80  |
| HR-24100 | 100    | 350       | -45~+80  |
| HR-3140  | 40     | 550       | -45~+80  |
| HR-3160  | 60     | 550       | -45~+80  |
| HR-31100 | 100    | 550       | -45~+80  |


## 外形尺寸

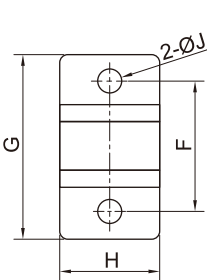

二孔安装座

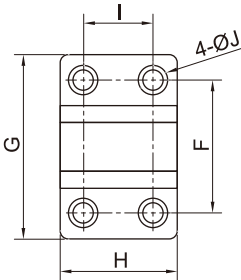

四孔安装座

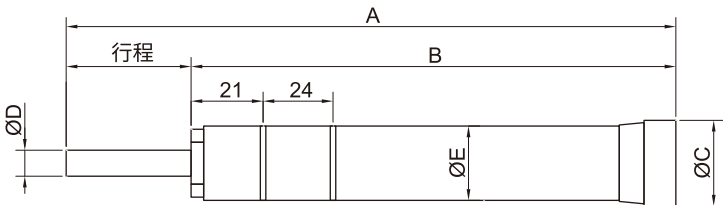

| 缸径       | 行程[mm] | A     | B     | C  | D  | E  | F  | G  | H [2孔/4孔] | I  | J [2孔/4孔] |
|----------|--------|-------|-------|----|----|----|----|----|-----------|----|-----------|
| HR-2415  | 15     | 158.8 | 143.8 | 28 | 9  | 24 | 37 | 52 | 28/33     | 20 | 5.7/6.5   |
| HR-2425  | 25     | 179.8 | 154.8 | 28 | 9  | 24 | 37 | 52 | 28/33     | 20 | 5.7/6.5   |
| HR-2430  | 30     | 207.2 | 177.2 | 28 | 9  | 24 | 37 | 52 | 28/33     | 20 | 5.7/6.5   |
| HR-2460  | 60     | 278.2 | 218.2 | 28 | 9  | 24 | 37 | 52 | 28/33     | 20 | 5.7/6.5   |
| HR-2480  | 80     | 343.1 | 263.1 | 28 | 9  | 24 | 37 | 52 | 28/33     | 20 | 5.7/6.5   |
| HR-24100 | 100    | 399.2 | 299.2 | 28 | 9  | 24 | 37 | 52 | 28/33     | 20 | 5.7/6.5   |
| HR-3140  | 40     | 270   | 230   | 36 | 12 | 31 | 44 | 60 | -/42      | 26 | -/6.5     |
| HR-3160  | 60     | 325   | 265   | 36 | 12 | 31 | 44 | 60 | -/42      | 26 | -/6.5     |
| HR-31100 | 100    | 405   | 305   | 36 | 12 | 31 | 44 | 60 | -/42      | 26 | -/6.5     |