

符号/特点


- 1.外形轻巧, 安装简易, 便于快速拆装;
- 2.金属部件镀镍处理耐腐蚀, 经久耐用;
- 3.螺纹预涂氟胶, 密封性好, 使用便捷;
- 4.脱离环和簧片设计升级, 易于拆卸气管, 增强耐冲击性和寿命。



标准规格


配管直径 mm	Φ4	Φ6	Φ8	Φ10	Φ12	Φ16
使用流体	压缩空气、水					
管使用压力范围 MPa (kgf/cm²)	0~9 (0~9.2)					
环境及流体温度 °C	0~60					

螺纹规格

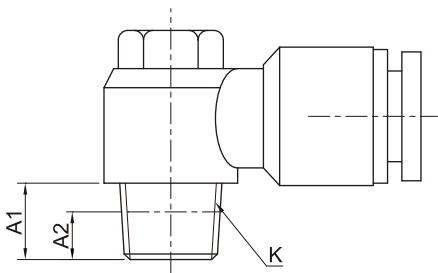

螺纹规格	M5×0.8	R1/8	R1/4	R3/8	R1/2
安装扭矩 (N.m)	1.5~1.9	7~9	12~14	22~24	28~30
A1	4	7	9	10	11
A2	4	4	6	6.5	8

接管要求




管径	聚氨酯管 A	尼龙管 A	半径 R
Ø4	±0.10	±0.08	20
Ø6	±0.12	±0.10	30
Ø8	±0.12	±0.10	50
Ø10	±0.15	±0.12	80
Ø12	±0.15	±0.12	150
Ø16	±0.15	±0.12	350



快插接头

4通快插接头


• ZZA 塑料X型4通

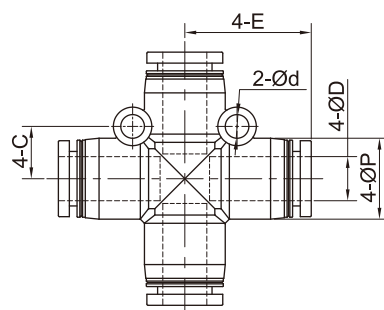

型号	E	C	ØP	ØD	Ød
ZZA04	18.8	7	11	4	3.2
ZZA06	19.3	8	13	6	3.2
ZZA08	22.5	9	14.8	8	3.2
ZZA10	28.5	12	18.4	10	4.2
ZZA12	29.5	13.5	21	12	4.2


5通快插接头

• ZK 塑料5通

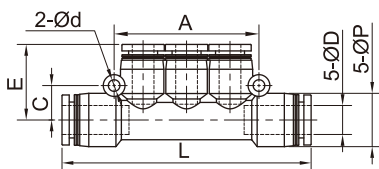

型号	L	A	C	ØP	E	ØD	Ød
ZK04	56.7	35.5	8	13	19.2	4	3.2
ZK06	60.9	41.5	9	14.8	20.1	6	3.2
ZK08	79.9	47.5	11	18.4	23.8	8	4.2
ZK10	106	60.5	12	21	28.2	10	4.2


• ZKG 变径塑料5通

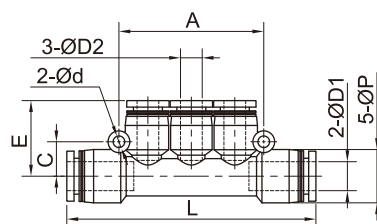

型号	L	A	C	ØP	E	ØD1	ØD2	Ød
ZKG06-04	56.7	35.5	8	13	19.2	6	4	3.2
ZKG08-06	61.3	41.5	9	14.8	20.1	8	6	3.2
ZKG10-08	81.9	47.5	11	18.4	23.8	10	8	4.2
ZKG12-10	106	60.5	12	21	28.2	12	10	4.2

管塞

• ZP 管塞



型号	B	C	ØP	ØD
ZP04	28	15	5	4
ZP06	33	17	7	6
ZP08	37	18	9	8
ZP10	41.5	20.5	11	10
ZP12	43.5	23	13	12
ZP16	50.5	26.5	17	16