

符号/特点


- 1.外形轻巧, 安装简易, 便于快速拆装;
- 2.金属部件镀镍处理耐腐蚀, 经久耐用;
- 3.螺纹预涂氟胶, 密封性好, 使用便捷;
- 4.脱离环和簧片设计升级, 易于拆卸气管, 增强耐冲击性和寿命。



标准规格


配管直径 mm	Φ4	Φ6	Φ8	Φ10	Φ12	Φ16
使用流体	压缩空气、水					
管使用压力范围 MPa (kgf/cm²)	0~9 (0~9.2)					
环境及流体温度 °C	0~60					

螺纹规格

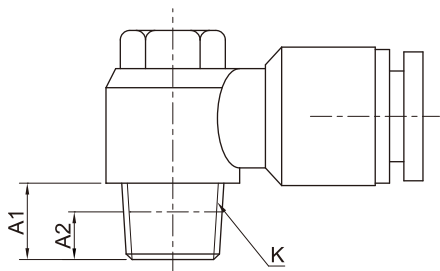

螺纹规格	M5×0.8	R1/8	R1/4	R3/8	R1/2
安装扭矩 (N.m)	1.5~1.9	7~9	12~14	22~24	28~30
A1	4	7	9	10	11
A2	4	4	6	6.5	8


接管要求

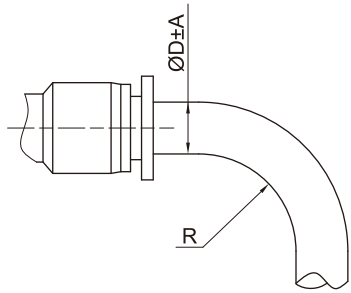

管径	聚氨酯管 A	尼龙管 A	半径 R
Ø4	±0.10	±0.08	20
Ø6	±0.12	±0.10	30
Ø8	±0.12	±0.10	50
Ø10	±0.15	±0.12	80
Ø12	±0.15	±0.12	150
Ø16	±0.15	±0.12	350


2通迷你接头

• MZC 螺纹直通



型号	ØD	R	B	L	ØP	内六角
MZC03-M3	3	M3	3	15.2	6	-
MZC03-M5	3	M5	3.5	15.7	8	2
MZC03-M6	3	M6	4	16.2	8	2
MZC04-M3	4	M3	3	16.5	8	-
MZC04-M5	4	M5	3.5	17	8	2
MZC04-M6	4	M6	4	17.5	8	2.5
MZC04-01	4	Rc1/8	7.5	16	10	3
MZC06-M5	6	M5	3.5	18.1	10	2
MZC06-M6	6	M6	4	18.5	10	2.5
MZC06-01	6	Rc1/8	7.5	19.2	10	4

• MZOC 螺纹圆直通



型号	ØD	R	A	B	ØP	内六角
MZOC03-M3	3	M3	3	15.2	6	-
MZOC03-M5	3	M5	3.5	15.7	8	2
MZOC03-M6	3	M6	4	16.2	8	2
MZOC04-M3	4	M3	3	16.5	8	-
MZOC04-M5	4	M5	3.5	17	8	2
MZOC04-M6	4	M6	4	17.5	8	2.5
MZOC04-01	4	Rc1/8	7.5	16	10	3
MZOC06-M5	6	M5	3.5	18.1	10	2
MZOC06-M6	6	M6	4	18.5	10	2.5
MZOC06-01	6	Rc1/8	7.5	19.2	10	4