

符号/特点


- 1.外形轻巧, 安装简易, 便于快速拆装;
- 2.金属部件镀镍处理耐腐蚀, 经久耐用;
- 3.螺纹预涂氟胶, 密封性好, 使用便捷;
- 4.脱离环和簧片设计升级, 易于拆卸气管, 增强耐冲击性和寿命。



标准规格


配管直径 mm	Φ4	Φ6	Φ8	Φ10	Φ12	Φ16
使用流体	压缩空气、水					
管使用压力范围 MPa (kgf/cm²)	0~9 (0~9.2)					
环境及流体温度 °C	0~60					

螺纹规格

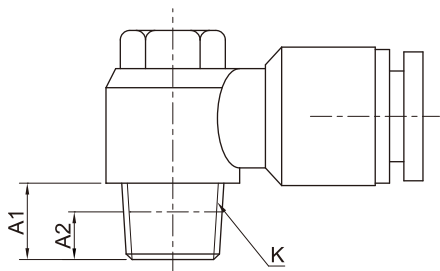

螺纹规格	M5×0.8	R1/8	R1/4	R3/8	R1/2
安装扭矩 (N.m)	1.5~1.9	7~9	12~14	22~24	28~30
A1	4	7	9	10	11
A2	4	4	6	6.5	8


接管要求

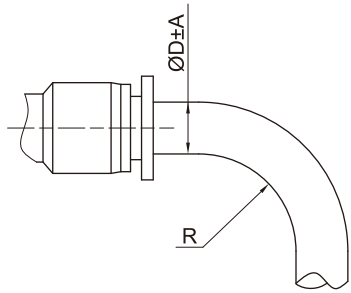

管径	聚氨酯管 A	尼龙管 A	半径 R
Ø4	±0.10	±0.08	20
Ø6	±0.12	±0.10	30
Ø8	±0.12	±0.10	50
Ø10	±0.15	±0.12	80
Ø12	±0.15	±0.12	150
Ø16	±0.15	±0.12	350


隔板2通快插接头

•ZMF 内螺纹隔板直通

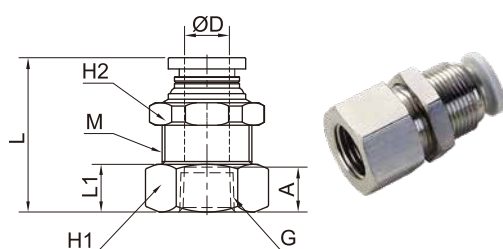

型号	ØD	L	A	L1	H1	H2	G	M
CMF4-M5	4	21.7	5.5	7.5	14	14	M5	M12X1
CMF4-G01	4	24.2	8	10	14	14	G1/8	M12X1
CMF4-G02	4	27.2	11	13	17	14	G1/4	M12X1
CMF6-M5	6	22.4	5.5	5.3	17	17	M5	M14X1
CMF6-G01	6	24.9	8	7.8	17	17	G1/8	M14X1
CMF6-G02	6	30.1	11	13	17	17	G1/4	M14X1
CMF6-G03	6	31.1	12	14	21	17	G3/8	M14X1
CMF6-G04	6	33.1	14	16	24	17	G1/2	M14X1
CMF8-G01	8	28	8	6	19	19	G1/8	M16X1
CMF8-G02	8	35	11	13	19	19	G1/4	M16X1
CMF8-G03	8	36	12	14	21	19	G3/8	M16X1
CMF8-G04	8	37.7	14	15.7	24	19	G1/2	M16X1
CMF10-G01	10	28.2	8	7.4	24	24	G1/8	M20X1
CMF10-G02	10	31.8	11	10.3	24	24	G1/4	M20X1
CMF10-G03	10	34.4	12	12.9	24	24	G3/8	M20X1
CMF10-G04	10	37.5	14	16	24	24	G1/2	M20X1
CMF12-G01	12	31.3	8	7	24	27	G1/8	M22X1
CMF12-G02	12	34.8	11	10.5	24	27	G1/4	M22X1
CMF12-G03	12	35.9	12	11.6	24	27	G3/8	M22X1
CMF12-G04	12	40.3	14	16	24	27	G1/2	M22X1
CMF16-G01	16	39	11	6	32	32	G1/4	M27X1
CMF16-G02	16	39	12	6	32	32	G3/8	M27X1
CMF16-G03	16	40	14	7	32	32	G1/2	M27X1

•ZM 隔板2通

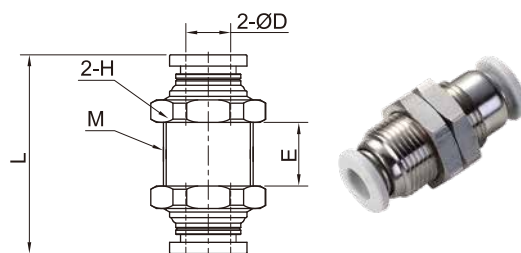

型号	ØD	M	E	B	H
ZM4	4	M12x1	11.9	31.9	14
ZM6	6	M14x1	10.7	33.6	17
ZM8	8	M16x1	12	37.5	19
ZM10	10	M20x1	14.1	40.8	24
ZM12	12	M22x1	17	47.1	27
ZM16	16	M27x1	21	51	32