

符号/特点


- 1.外形轻巧, 安装简易, 便于快速拆装;
- 2.金属部件镀镍处理耐腐蚀, 经久耐用;
- 3.螺纹预涂氟胶, 密封性好, 使用便捷;
- 4.脱离环和簧片设计升级, 易于拆卸气管, 增强耐冲击性和寿命。



标准规格


配管直径 mm	Φ4	Φ6	Φ8	Φ10	Φ12	Φ16
使用流体	压缩空气、水					
管使用压力范围 MPa (kgf/cm²)	0~9 (0~9.2)					
环境及流体温度 °C	0~60					

螺纹规格

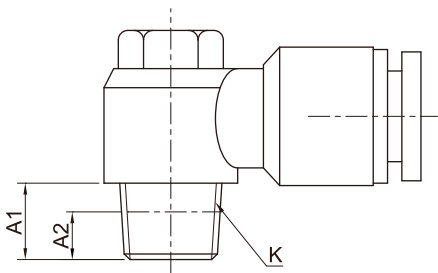

螺纹规格	M5×0.8	R1/8	R1/4	R3/8	R1/2
安装扭矩 (N.m)	1.5~1.9	7~9	12~14	22~24	28~30
A1	4	7	9	10	11
A2	4	4	6	6.5	8

接管要求




管径	聚氨酯管 A	尼龙管 A	半径 R
Ø4	±0.10	±0.08	20
Ø6	±0.12	±0.10	30
Ø8	±0.12	±0.10	50
Ø10	±0.15	±0.12	80
Ø12	±0.15	±0.12	150
Ø16	±0.15	±0.12	350



快插接头


外螺纹2通快插接头

•ZOC 螺纹圆直通

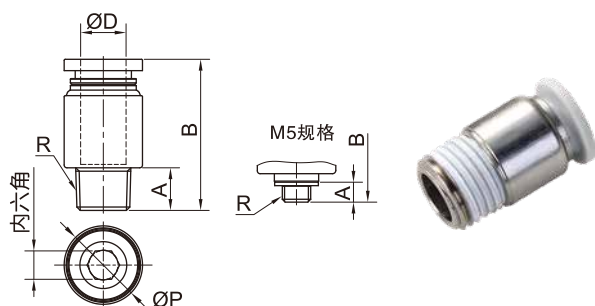

型号	ØD	R	A	B	Ø P	内六角
ZOC04-M5	4	M5	4	21.2	10.3	2
ZOC04-01	4	Rc1/8	7.5	20.2	10.3	3
ZOC04-02	4	Rc1/4	9.5	18.3	14	3
ZOC06-M5	6	M5	4	22.3	12.3	2
ZOC06-01	6	Rc1/8	7.5	20.8	12.3	4
ZOC06-02	6	Rc1/4	9.5	22.6	14	4
ZOC06-03	6	Rc3/8	10.5	20.6	17	4
ZOC06-04	6	Rc1/2	13.5	24.6	21	4
ZOC08-01	8	Rc1/8	7.5	27	14.3	5
ZOC08-02	8	Rc1/4	9.5	24.5	14.3	6
ZOC08-03	8	Rc3/8	10.5	22.1	17	6
ZOC08-04	8	Rc1/2	13.5	25.5	21	6
ZOC10-01	10	Rc1/8	7.5	29.1	17.3	5
ZOC10-02	10	Rc1/4	9.5	30.6	17.3	6
ZOC10-03	10	Rc3/8	10.5	26.4	17.3	8
ZOC10-04	10	Rc1/2	13.5	25.8	21	8
ZOC12-01	12	Rc1/8	7.5	31.8	21.3	5
ZOC12-02	12	Rc1/4	9.5	33.8	21.3	6
ZOC12-03	12	Rc3/8	10.5	29.8	21.3	8
ZOC12-04	12	Rc1/2	13.5	32.8	21.3	8
ZOC16-02	16	Rc1/4	9.5	37	24.3	6
ZOC16-03	16	Rc3/8	10.5	38	24.3	8
ZOC16-04	16	Rc1/2	13.5	35	24.3	10

•ZOC-G 螺纹圆直通

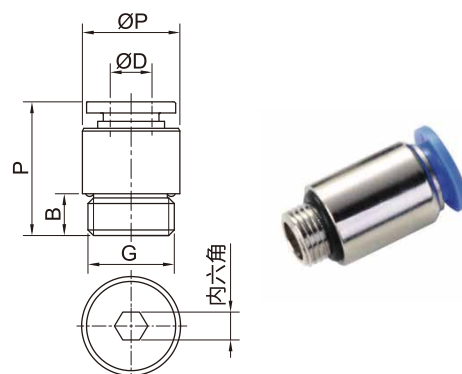

型号	ØD	G	B	L	ØP	内六角
ZOC04-G01	4	G1/8	5.5	19.7	14	3
ZOC04-G02	4	G1/4	6.5	17.8	17	3
ZOC06-G01	6	G1/8	5.5	20.3	14	4
ZOC06-G02	6	G1/4	6.5	21	17	4
ZOC06-G03	6	G3/8	7.5	19.6	20	4
ZOC06-G04	6	G1/2	9.5	23.1	24	4
ZOC08-G01	8	G1/8	5.5	26	14.3	5
ZOC08-G02	8	G1/4	6.5	22.5	17	6
ZOC08-G03	8	G3/8	7.5	22	20	6
ZOC08-G04	8	G1/2	9.5	24	24	6
ZOC10-G01	10	G1/8	5.5	27.9	14.3	5
ZOC10-G02	10	G1/4	6.5	28.9	17.3	6
ZOC10-G03	10	G3/8	7.5	25.4	20	8
ZOC10-G04	10	G1/2	9.5	24.8	24	8
ZOC12-G01	12	G1/8	5.5	31	15.5	5
ZOC12-G02	12	G1/4	6.5	32	17	6
ZOC12-G03	12	G3/8	7.5	28.3	20.3	8
ZOC12-G04	12	G1/2	9.5	30.3	24	8
ZOC16-G02	16	G1/4	6.5	34.5	19.5	6
ZOC16-G03	16	G3/8	7.5	35.5	21	8
ZOC16-G04	16	G1/2	9.5	32	24.3	10